SIGN	REVISION	DATE	BY
△1	Renewal	111101	R. T
△2	Renewal	160406	W. S

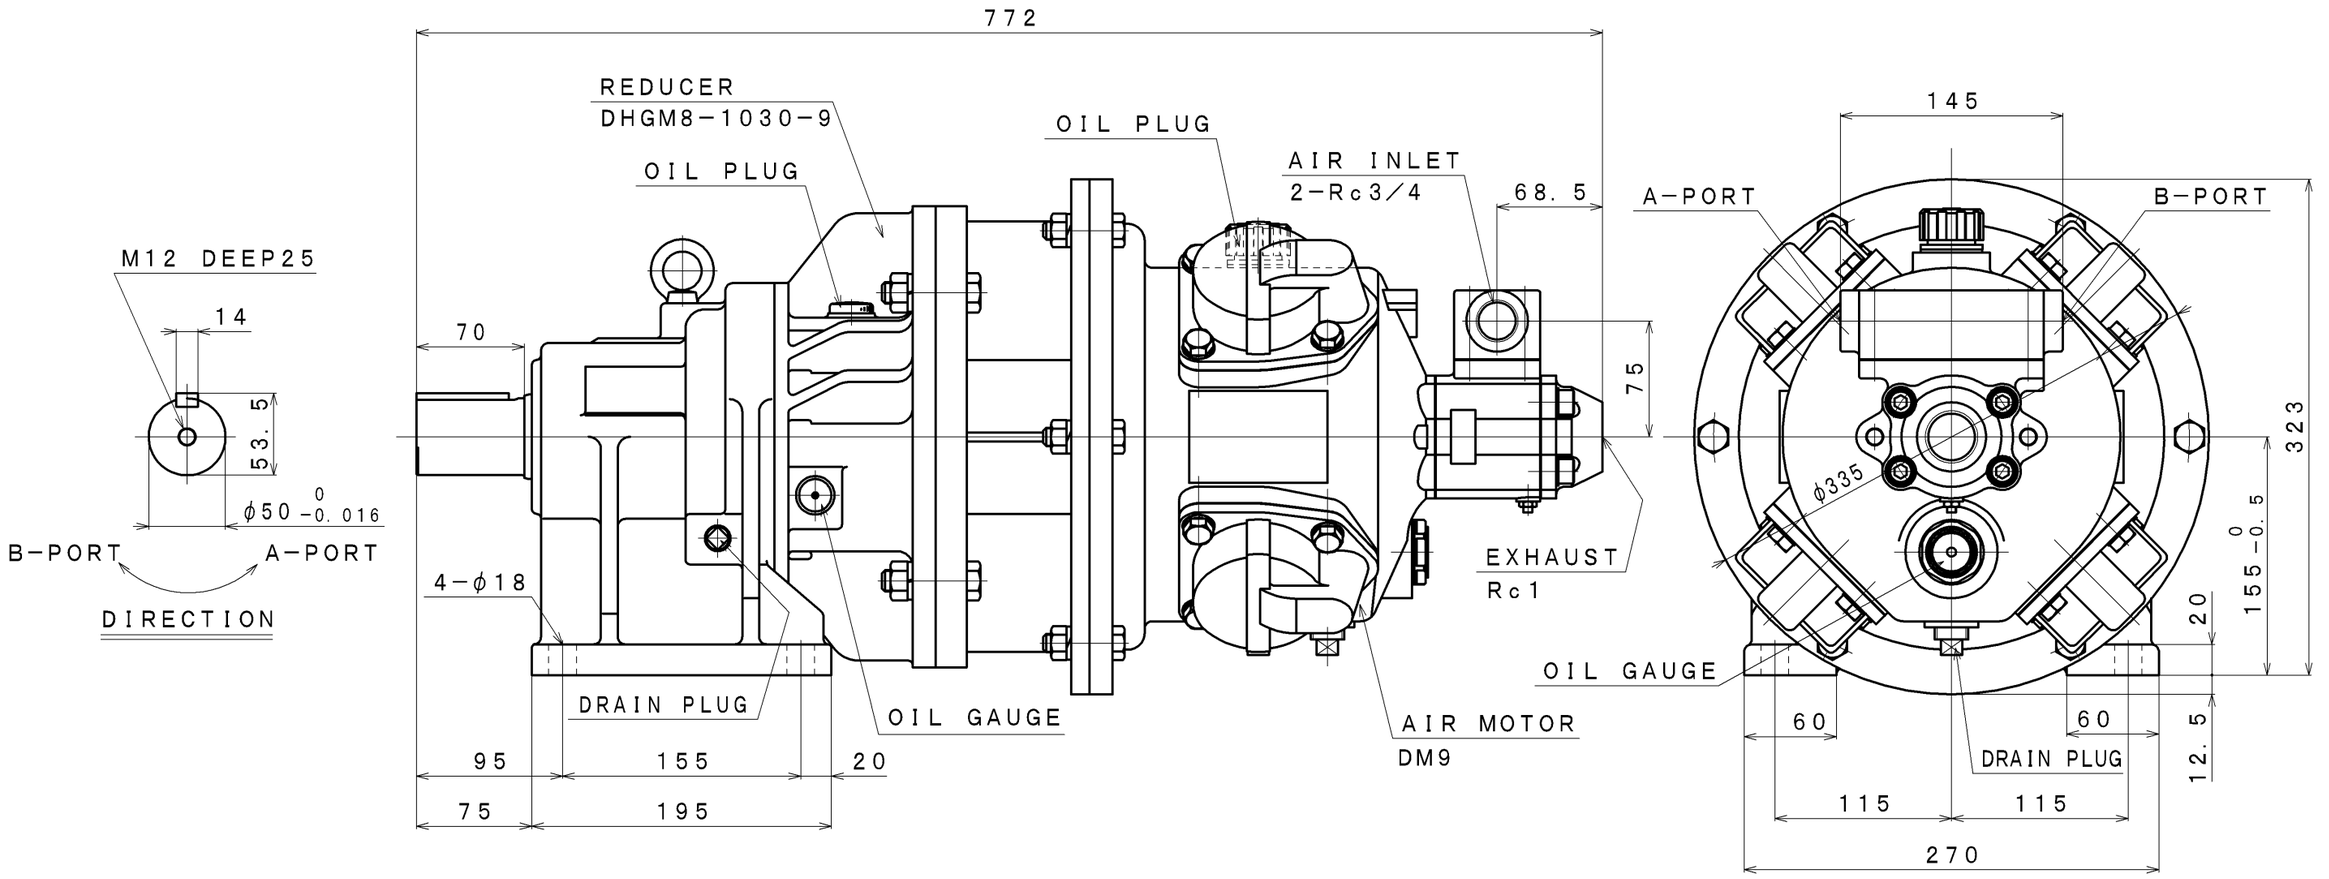

SPECIFICATION

AIR PRESSURE	AT MAXIMUM OUTPUT				※ ALLOWABLE SHAFT LOAD		LUBRICATING OIL		MASS
	OUTPUT	SPEED	TORQUE	AIR CONSUMPTION △2	RADIAL	THRUST	AIR MOTOR	REDUCER	
(MPa)	(kW)	(rpm)	(N・m)	(m^3/min (nor))	(kN)	(kN)	△1		(kg)
0.6	3.82	122	299	3.7	6.7	−	JIS K2213-1 Turbine Oil ISO VG32 (1000cc)	JIS K2219 Gear Oil ISO VG220 (500cc)	about 94
0.5	3.08	115	256	3.4					
0.4	2.51	106	226	2.9					

※:At Mid of Shaft

APPROVED	CHECKED	REVIEWED	DRAWN	PARTICULARS	OUTLINE	DATE	OCT. 07. 2010
M. M	M. S	K. S	R. T	MODEL	DM9−G−1030−9 AIR MOTOR	NOTE	

SAN−EI SEIKI SEISAKUSHO CO., LTD.	DWG. NO.	E310−551 △2	SCALE 1/4